

SYS-SR567R3M8501

Intel® Xeon®/Core™ i7/i5/i3 6th Generation Processor Based 4U Rack Mount System with 14x USB/ 6x COM Ports/ VGA/ DVI/ HDMI/ Dual



FEATURES

- Intel® 6th Generation Xeon®/Core™ i7/5/3 Processor in Socket 1151
- Four 288pin DIMM Dual-channel DDR4 1866/2133MHz (ECC) up to 64GB
- Intel® C236 chipset
- Intel® i210AT & I219LM on board for Dual Gigabit Ethernet
- Integrated Intel® HD Graphics with VGA//DVI/HDMI connectors
- Realtek® ALC888S High Definition Audio chip on-board
- Multi I/O: 14 x USB, 6 x COM ports, 6 x SATA,
- Expansion Slot: 2 x PCIe x16 (1 x16 or 2 x8 signal) (Gen 3) 2 x PCIe x4 (Gen 3), 3 x PCI

Introduction

SYS-SR567R3M8501 Industrial 4U Rack Mount System is based on Intel® 6th Generation Core™ i7/5/3 Processor & Intel® C236 Chipset. SYS-SR567R3M8501 comes equipped with 14 x USB Ports, 6x COM Ports, Dual Gigabit Ethernet & Triple Display Output (VGA, DVI & HDMI). This is an excellent cost efficient and best expandability system with providing up to 2 x PCIe x16 (1 x16 or 2 x8 signal) (Gen 3), 2 x PCIe x4 (Gen 3), 3 x PCI.

SYS-SR567R3M8501 is very 4U Rack Mount System and is ideally suited for high-performance systems for industrial control and Automation.

Specification

System	
Processor	<ul style="list-style-type: none"> • 6th Gen Intel® Core™ Processors LGA 1151 socket for: Intel® Xeon® Processor E3-1275 v5, 3.6GHz (4.0GHz), 80W Intel® Core™ i7-6700 Processor, 3.4GHz (4.0GHz), 65W Intel® Core™ i5-6500 Processor, 3.2GHz (3.6GHz), 65W Intel® Core™ i3-6100 Processor, 3.7GHz, 65W Intel® Pentium® Processor G4400, 3.3GHz, 65W
BIOS	<ul style="list-style-type: none"> • Insyde SPI 128Mbit
System Memory	<ul style="list-style-type: none"> • Four 288pin DIMM Dual-channel DDR4 1866/2133MHz (ECC) up to 64GB
Chipset	<ul style="list-style-type: none"> • Intel® C236 Express chipset.
Video	<ul style="list-style-type: none"> • Intel® HD Gen 9 Graphics 1 x VGA, 1 x DVI-I (DVI-D signal), 1 x HDMI on rear I/O. • Support up to triple independent display with CPU.
Ethernet	<ul style="list-style-type: none"> • 1 x Intel® I210AT PCIe (10/100/1000Mbps), 1 x Intel® I219LM PCIe with iAMT11.0 (10/100/1000Mbps) (only Core i7/i5 supports iAMT)
On Board I/O	<ul style="list-style-type: none"> • 1x Connector for PS/2 Mouse/Keyboard • 6x Serial ports (2x RS-232/422/485 selectable) • 6 Serial ATA ports • 6 SATA 3.0 ports with data transfer rate up to 6Gb/s Supports RAID 0/1/5/10 • 14 USB: 6 USB 3.0 (4 x rear; 2 x Header), 8 USB 2.0 ports (2 x rear; 6 x Header) • 8bit Digital I/O
Watchdog Timer	<ul style="list-style-type: none"> • Programmable watchdog timer for 1~255 seconds.
CMOS	<ul style="list-style-type: none"> • On-board RTC with 242 bytes of Battery-back CMOS RAM.
Audio	<ul style="list-style-type: none"> • RealTek ALC888S-VD2-GR high-definition audio chip on-board. • Support 1 x Line-out, 1 x Mic-in, SPDIF
Power	<ul style="list-style-type: none"> • One 24pins power connector for system power. • One ATX-12V 4-pins connector for CPU power. • Support both AT and ATX mode.
Cooling	<ul style="list-style-type: none"> • One CPU cooling FAN connector nearby CPU socket • Three system fan connectors for system cooling


Mechanical & Environment

Drive bays	<ul style="list-style-type: none"> • Totally 5 drive bay: 3x 5.25" CD and 2 x 3.5" HDD bay drive bay equipped with anti-vibration function
Front Panel	<ul style="list-style-type: none"> • Two USB 2.0 ports at front bezel
Motherboard	<ul style="list-style-type: none"> • ATX, uATX, Mini ITX Motherboards
Fan	<ul style="list-style-type: none"> • 1x 120mm Fan for Backplane
Power Supply	<ul style="list-style-type: none"> • Industrial 400W/500W Auto Ranging Power Supply
Expansion	<ul style="list-style-type: none"> • 14 Slot Backplane IP13-14x12 (PICMG 1.3 x 1, PCIe-x1 x 12) • 14 Slot Backplane IP13-14x4 (PICMG 1.3 x 1, PCIe-x4 x 8, PCIe1 x 4)
Color	<ul style="list-style-type: none"> • Beige
Dimension	<ul style="list-style-type: none"> • 482.9 x 177 x 452.2mm
Weight	<ul style="list-style-type: none"> • N.W: 21KGS G.W:23KGS
Operating Temperature	<ul style="list-style-type: none"> • 0°~60°C
Storage Temperature	<ul style="list-style-type: none"> • -40°~70°C
Relative Humidity	<ul style="list-style-type: none"> • 5~95%, non-condensing
Storage Humidity	<ul style="list-style-type: none"> • 5% ~ 95%
Altitude	<ul style="list-style-type: none"> • 10,000 Feet (3000 m)
Vibration (Operating)	<ul style="list-style-type: none"> • 1.5G Max
Shock	<ul style="list-style-type: none"> • 10G peak acceleration (10Msec duration)

Ordering Information

SYS-SR567R3M8501-C0	Intel® Xeon®/Core™ i7/i5/i3 6th Generation Processor Based 4U Rack Mount System with 14x USB/6x COM Ports/ VGA/ DVI/ HDMI/ Dual Gigabit LAN (Beige)
SYS-SR567R3M8501-C1	Intel® Xeon®/Core™ i7/i5/i3 6th Generation Processor Based 4U Rack Mount System with 14x USB/6x COM Ports/ VGA/ DVI/ HDMI/ Dual Gigabit LAN (Black)

Dimensions

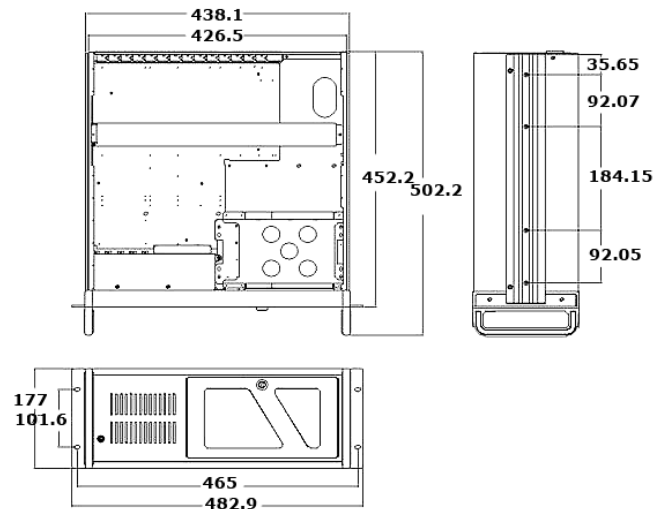

SINETIC Technologies Inc, reserves the right to change or update without notice, any information contained herein; to change without notice, the design construction, materials, processing or specifications of any products and to discontinue or limit production or distribution of any products. © SINETIC Technologies Inc. All rights reserved. SYS-SR567R3M8501 Rev 1.1 Dated 201601